


technical data

process connection	M16x1,25
outer diameter tube D	3 mm
material (process-intrusive)	316L ^{*1}
material casing	1.4301/1.4305
surface roughness	Ra ≤0,8 ^{*1}
protection category	IP67 according to DIN EN 60529
protection class	III
sensor connection	M12 connector 4pin, Pin 1+2/3+4

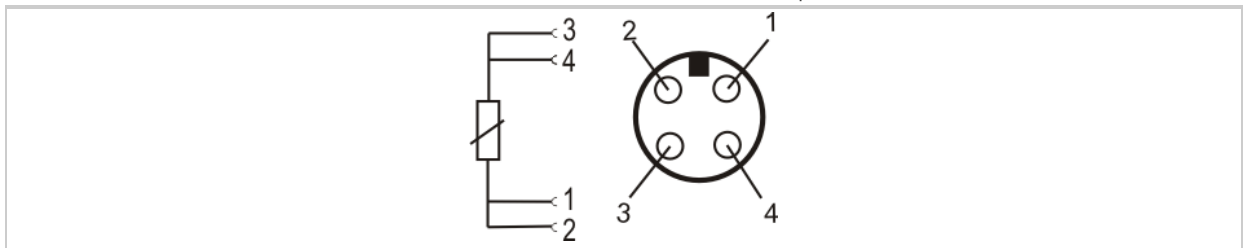

ambient conditions

process temperature	0°C...+150°C
installation instructions	For mounting in a suitable mounting application

Miscellaneous

labelling	by engraving of housing, "batch-no"
-----------	-------------------------------------

Type key configuration

Pos.:	Physical characteristics	Key	Characteristic
1	installation length "EL"	A0	45mm
2	sensorelement-type	B0	Pt100, tolerance class A according to DIN EN 60751
		B1	Pt100, tolerance class AA according to DIN EN 60751

Existing configurations

Type	Order number	Item number	Old order number
------	--------------	-------------	------------------

Remarks

*1 in contact with product PB

Revision

Version	Effective from	Comment
<u>1.0</u>	27.08.2014 13:46:40	Typenblatt angelegt